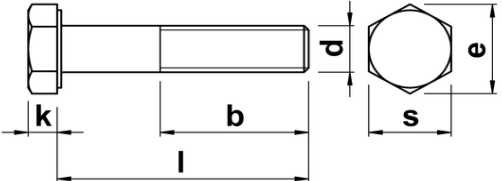


## TORNILLO HEXAGONAL DIN-931 | ISO-4014 (MÉTRICO)

Inoxidable A2 - AISI 304

Clase 70

<p>d Métrica del tornillo                  k Altura de la cabeza                  s Distancia entre caras (llave)  <b>b Longitud roscada</b>                  b<sub>a</sub> Hasta 125mm (incl)                  b<sub>b</sub> De 125 a 200mm (incl)                  b<sub>c</sub> Desde 200mm                  l Longitud seleccionada (sin cabeza)</p>	
--	--

### Cotas en milímetros (mm)

	M5	M6	M8	M10	M12	M14	M16	M18	M20	M22
d	5	6	8	10	12	14	16	18	20	22
k	3,5	4	5,5	7	8	9	10	12	13	14
s	8	10	13	17	19	22	24	27	30	32
b <sub>a</sub>	18	18	22	26	30	34	38	42	46	50
b <sub>b</sub>	22	24	28	32	36	40	44	48	52	56
b <sub>c</sub>	-	-	-	45	49	53	57	61	65	69
paso	0,8	1	1,25	1,5	1,75	2	2	2,5	2,5	2,5

	M24	M27	M30	M33	M36					
d	24	27	30	33	36					
k	15	17	19	21	22					
s	36	41	46	50	55					
b <sub>a</sub>	54	60	66	72	78					
b <sub>b</sub>	60	66	72	78	84					
b <sub>c</sub>	73	78	85	91	97					
paso	3	3	3,5	3,5	4					